
## **BOOMILEVER**



Loading Block Assembly and Bucket Stabilization Sticks - 2021

## Loading Block Assembly (Top View)




5 cm (5.b.i.)

Drill hole no larger than 8 mm in center of 5 cm by 5 cm face to accommodate ¼" threaded eyebolt (5.b.i.)

## **Bucket Stabilization Sticks** (Provide 2)


Spring-type door stop screwed into one end of each stabilization stick (5.d.)

each stabilization stick (5.d.)



Each stabilization stick is made from a piece of ½" dowel approximately 18 inches long (5.d.)

## Loading Block Assembly (Side View)

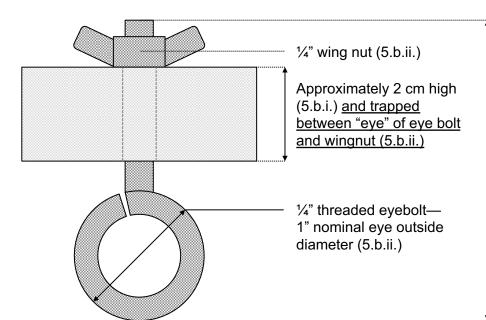

Minimum 2 1/4" length to maximum 4 1/2" length (5.b.ii.)

Total combined mass of Loading Block, eyebolt & wingnut, chain & S-hook, and five-gallon plastic bucket **may not exceed 1.5 kg** (5.b.v.)